



Drawing 1.1.

S Panel Wall PIR - wall sandwich panel with visible fastening, polyurethane / polyisocyanurate foam core

VARIANT 1 - Thickness 40mm to 100mm - STRAIGHT EDGE

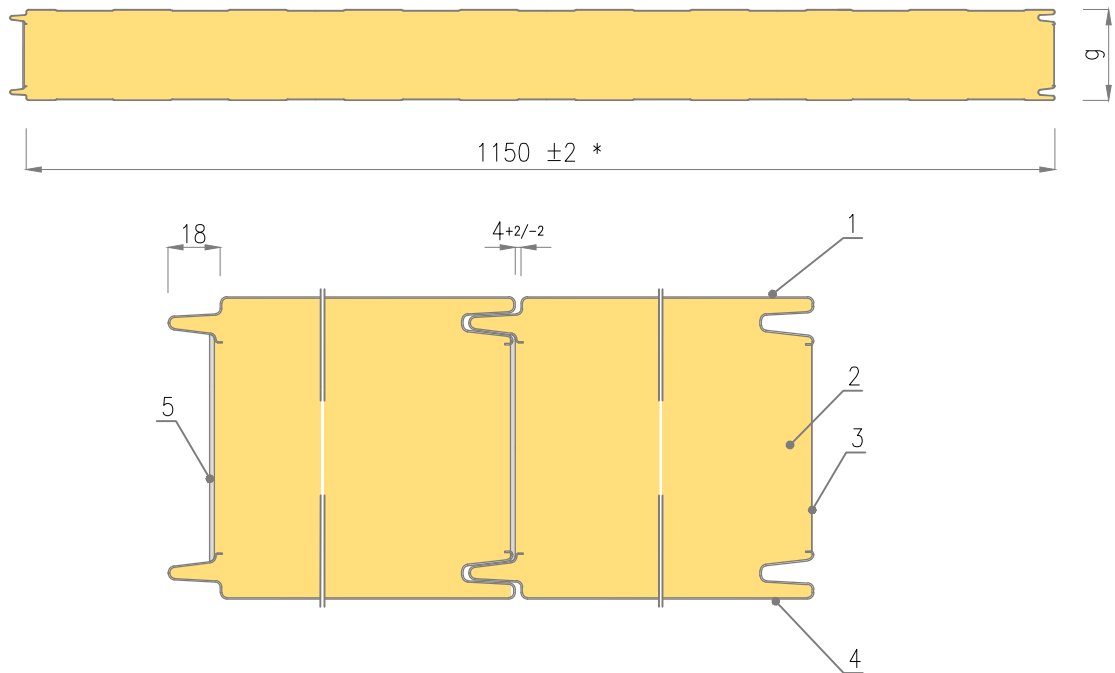

VARIANT 2 - Thickness 120 to 200 mm - SIDE EDGE WITH LABYRINTH JOINT

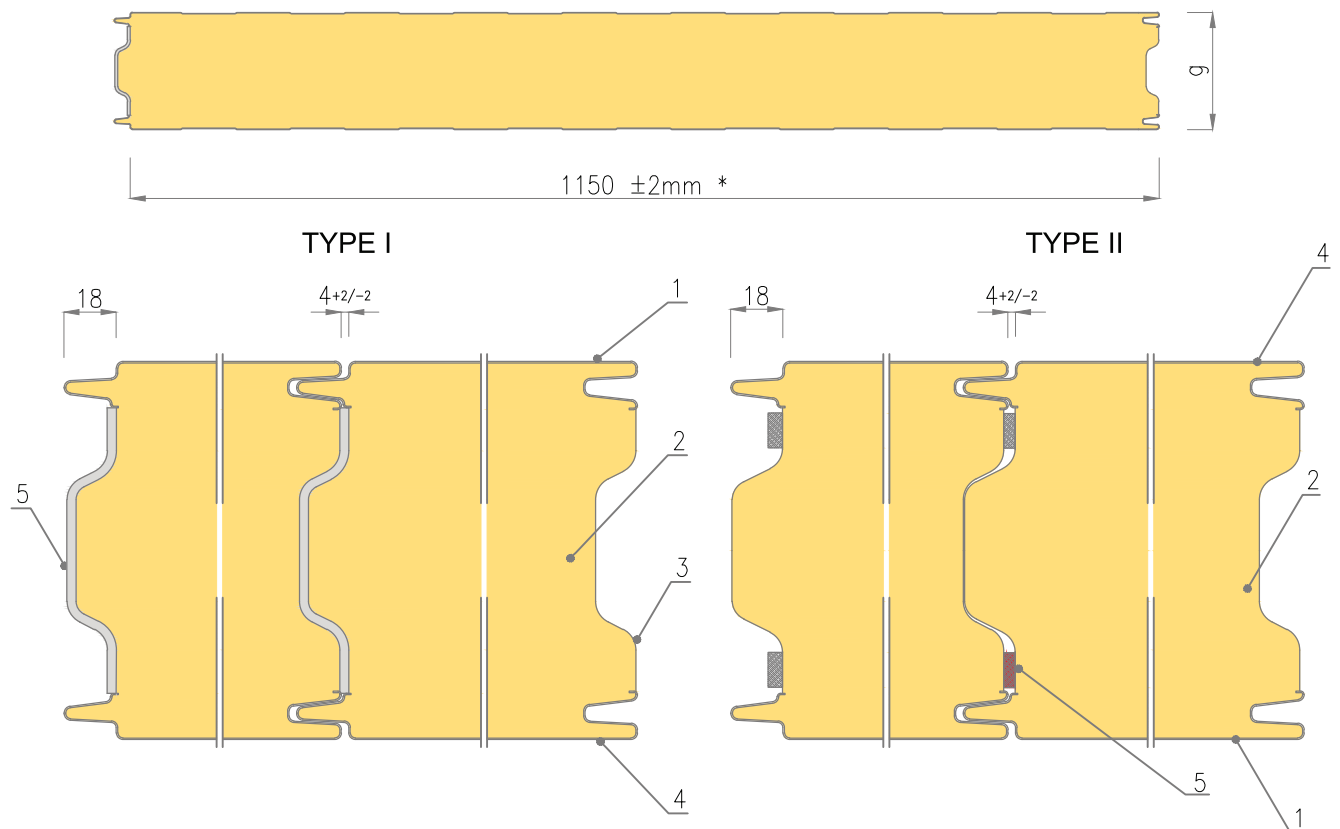

1. Steel lining, external, standard gauge 0.50-0.60 mm
2. Polyurethane / polyisocyanurate foam core
3. Protection strip preventing diffusion and water infiltration.
4. Steel lining, internal, standard gauge 0.40-0.50 mm
5. Factory-applied soft seal on side edge from the male lock side
6. Available profile types: Linear, Grooved, Corrugated, Smooth

*1150 mm - standard modular width of the panel
1000mm, 1100mm, 1150mm, 1200mm- modular widths available on request