
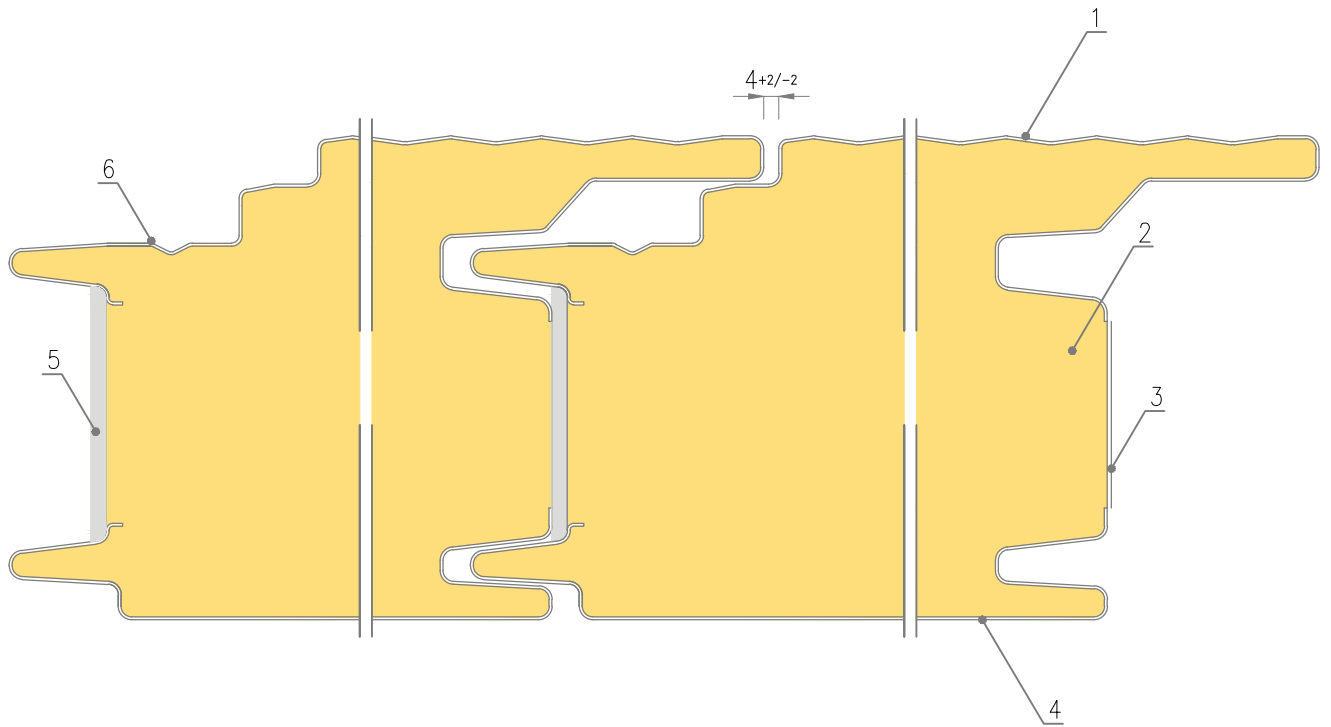


Drawing 2.

S Panel Gold PIR - wall sandwich panel with hidden fastening, polyurethane / polyisocyanurate foam core

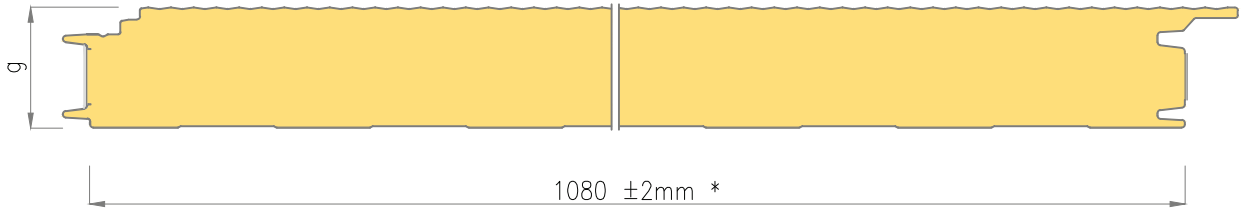

- 1. Steel lining, external, standard gauge 0.50-0.60 mm
- 2. Polyurethane / polyisocyanurate foam core
- 3. Protection strip preventing diffusion and water infiltration
- 4. Steel lining, internal, standard gauge 0.40-0.50 mm
- 5. Polyurethane seal
- 6. Fastening screw slot
- 7. Available profile types: Linear, Grooved, Corrugated, Smooth

*.: 1080 mm - standard modular width of the panel
1000mm - modular width available on request