
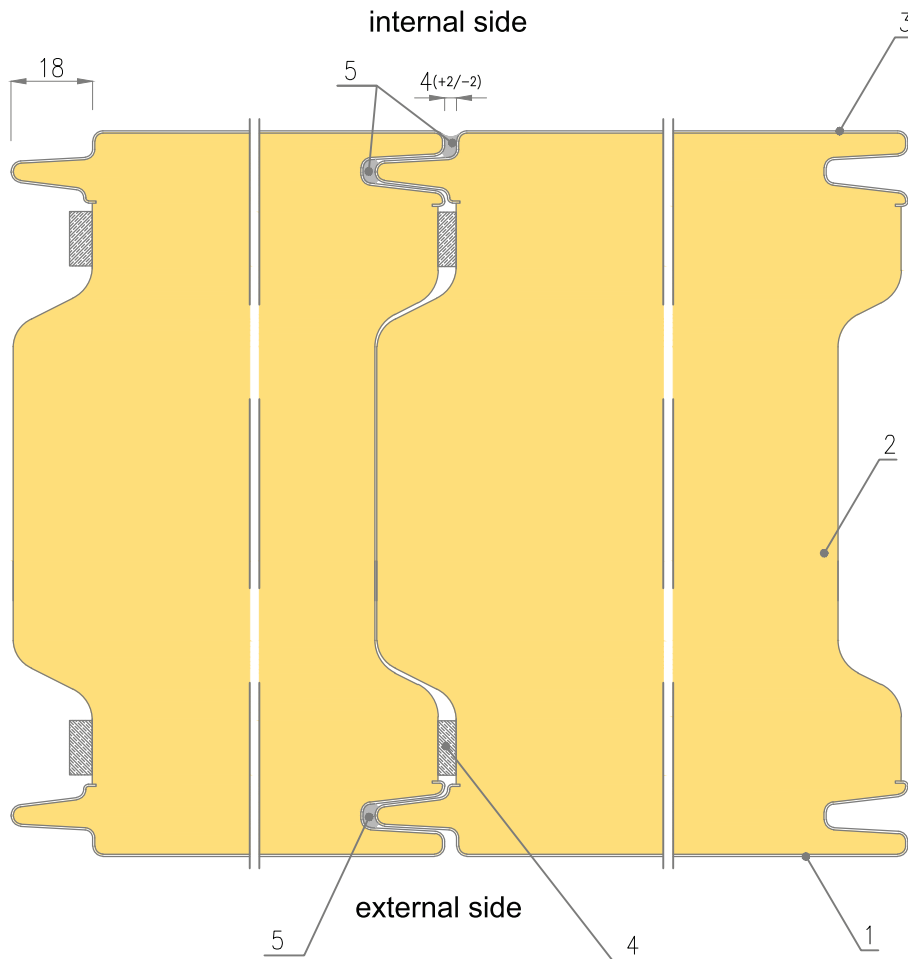


Drawing 3.
S Panel Cold PIR - wall sandwich panel, polyurethane / polyisocyanurate foam core

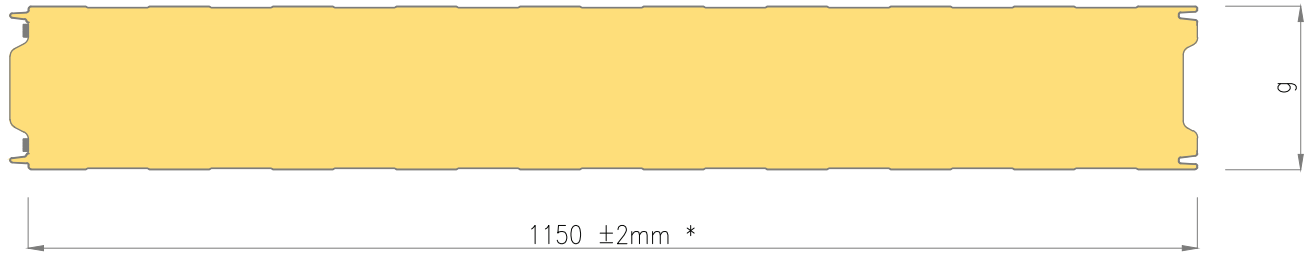

1. Steel lining, external, standard gauge 0.50-0.60 mm
2. Polyurethane / polyisocyanurate foam core
3. Steel lining, internal, standard gauge 0.40-0.50 mm
4. Factory-applied soft seal on side edge from the male lock side
5. Permanently plastic sealant applied at assembly
6. Available profile types: Linear, Grooved, Corrugated, Smooth

* 1150mm - standard modular width of the panel
1000mm; 1100mm; 1150mm; 1200mm - modular widths available on request