



Drawing 33.

S Panel PIR; MWF; EPS - sandwich panels - assembly to wall (masonry of rainf. concrete)

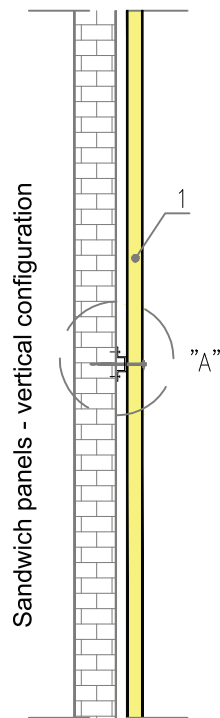


VERTICAL CONFIGURATION - INTERMEDIATE SUPPORT


Detail "A"

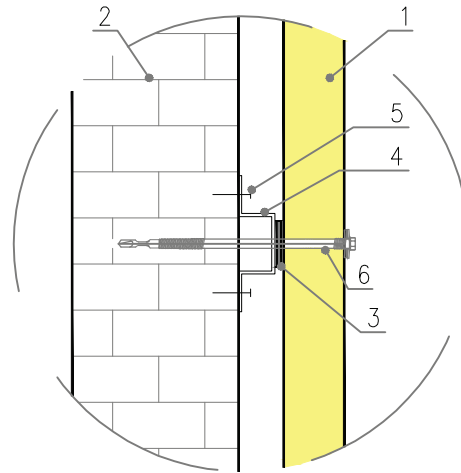


HORIZONTAL CONFIGURATION - PANEL JOINT

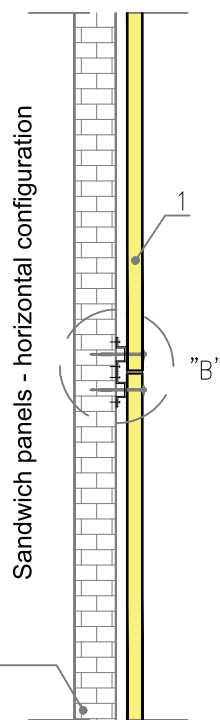

Detail "B"

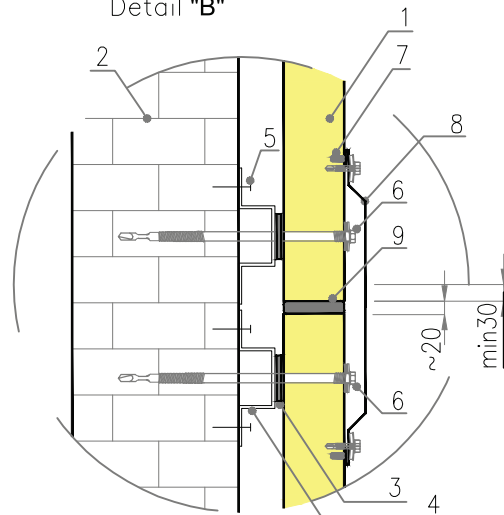

Custom steel section, thickness min. 1.00 mm

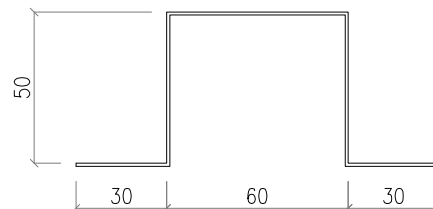

1. S Panel wall panel
2. Masonry wall
3. Self-adhesive PES sealing tape
4. Custom steel section according to the drawing*
5. Steel anchor**
6. Drive screw with EPDM washer
7. Sealant, permanently plastic
8. Ob-35 flashing
9. Polyurethane foam as ~20 mm movement joint fill

* Shape and location of steel section 4 must enable proper assembly of fasteners (drive screws).

** Type and spacing of steel anchors 5 must be defined according to the loads.